

305-320_w



AMERICAN RECOVERY AND REINVESTMENT ACT


Modules manufactured at our Jackson, MS facility qualify for projects that are required to meet the “Buy American” clause of the American Recovery and Reinvestment Act (ARRA)




MANAGEMENT SYSTEM

- ISO 9001:** Quality management system
- ISO 14001:** Standard for environmental management system
- OHSAS 18001:** International standard for occupational health and safety assessment system

PRODUCT CERTIFICATES

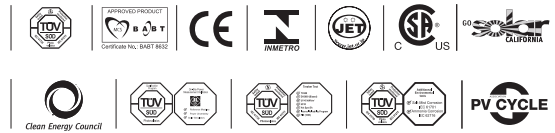

WARRANTY

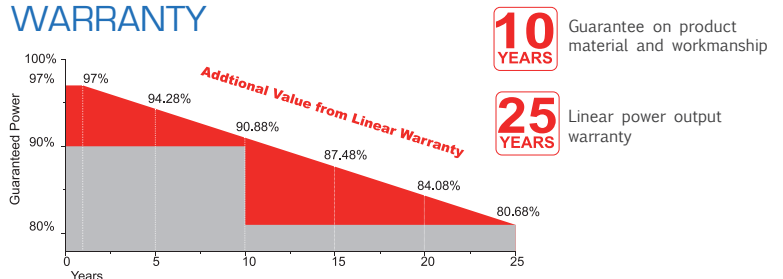

Safety

- Safety for salt mist corrosion (IEC61701, tested in TÜV SÜD)
- Safety for ammonia corrosion (IEC62716, tested in TÜV SÜD)
- Fire Rating: Class C
Module Fire Performance: Type 1

Reliability

- PID FREE
PID free products, passing TÜV SÜD system voltage durability test
- 1st
World 1st company to pass “Thresher Test” and “On-site Power Measurement Validation” certificate
- BANKABLE
Bankable products

Performance

- Advanced
Outstanding power output capability at low irradiance
- 100% In-line Electroluminescence (EL) tests minimize breakage rate
- Photon TOP
Top rank in Photon yield measurement



*BLACK FRAME / BLACK BACK-SHEET PRODUCTS ARE AVAILABLE UPON REQUEST.

305-320_W

Electrical Characteristics (STC)

Module Type	SRP-305-6PA	SRP-310-6PA	SRP-315-6PA	SRP-320-6PA
Maximum Power STC - P _{mp} (W)	305	310	315	320
Open Circuit Voltage - Voc (V)	45.50	45.70	45.90	46.10
Short Circuit Current - I _{sc} (A)	8.50	8.60	8.73	8.82
Maximum Power Voltage - V _{mp} (V)	38.20	38.40	38.60	38.80
Maximum Power Current - I _{mp} (A)	7.99	8.08	8.17	8.25
Module Efficiency STC - η_m (%)	15.71	15.97	16.23	16.49

STC: Irradiance 1000 W/m² module temperature 25°C AM=1.5;
Power measurement tolerance: +/-3%

Electrical Characteristics (NOCT)

Module Type	SRP-305-6PA	SRP-310-6PA	SRP-315-6PA	SRP-320-6PA
Maximum Power NOCT - P _{mp} (W)	225	228	232	236
Open Circuit Voltage - Voc (V)	42.09	42.27	42.46	42.64
Short Circuit Current - I _{sc} (A)	6.80	6.88	6.98	7.05
Maximum Power Voltage - V _{mp} (V)	35.52	35.71	35.89	36.08
Maximum Power Current - I _{mp} (A)	6.33	6.38	6.46	6.54

NOCT: Irradiance 800 W/m² ambient temperature 20°C wind speed: 1m/s;
Power measurement tolerance: +/-3%

Power Tolerance (W)	(0,+4.99)
Maximum System Voltage (V)	1000 (TÜV), 1000 (UL)
Maximum Series Fuse Rating (A)	15

Temperature Characteristics


P _{max} Temperature Coefficient	-0.42 %/°C
Voc Temperature Coefficient	-0.32 %/°C
I _{sc} Temperature Coefficient	+0.04 %/°C
Operating Temperature	-40~+85°C
Nominal Operating Cell Temperature (NOCT)	45±2 °C

Packing Configuration

Container	20'GP	40'GP
Pieces per Pallet	20	20
Pallets per Container	10	22
Pieces per Container	200	440

Mechanical Specifications

External Dimensions	1956 x 992 x 50 mm
Weight	24.0 kg
Solar Cells	Polycrystalline 156 x 156 mm (72pcs)
Front Glass	3.2 mm tempered glass, low iron
Frame	Anodized aluminum alloy
Junction Box	IP65 / IP67
Output Cables	4.0 mm ² , cable length: 900 mm
Connector	MC4 Compatible
Mechanical Load	5400 Pa

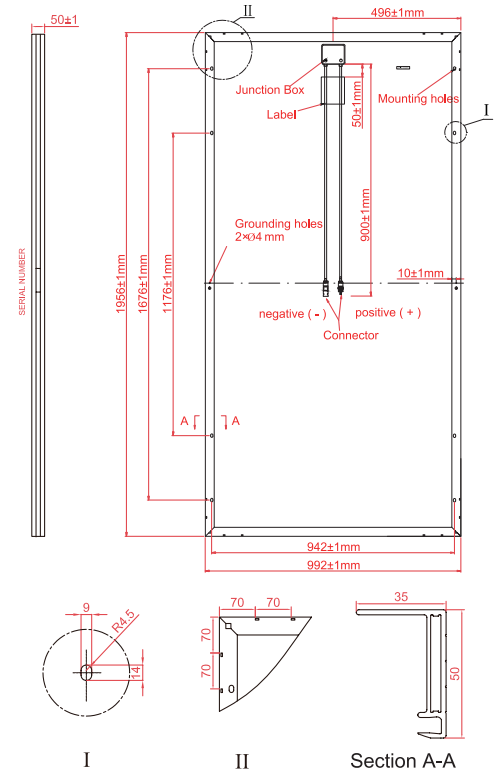

* All Dimensions in mm

* The above drawing is a graphical representation of the product.
For engineering quality drawings please contact SERAPHIM.

I-V & P-V Curve (SRP-6PA)

